


Hosa Technology, Inc.

USM-422 USB to MIDI Cable Installation – Microsoft Windows Vista™

1. Connect **USM-422** to an available **USB port**
2. You will be advised via a pop-up window that your computer is installing the device
3. When complete you will see the following message, thus enabling you to commence tracking

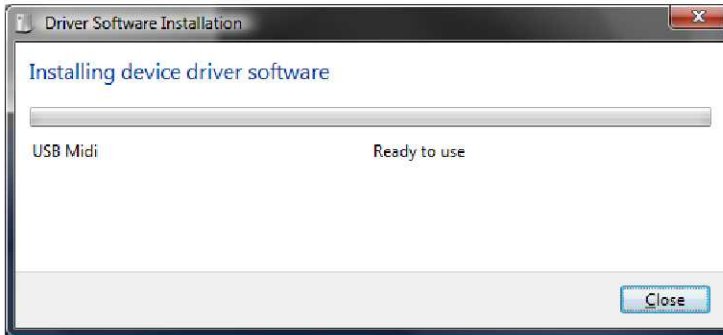


4. Connect the MIDI **"IN"** (Red) plug to the **"OUT"** port on your external MIDI keyboard/device
5. Connect the MIDI **"OUT"** (Black) plug to the **"IN"** port on your external MIDI keyboard/device
6. Please refer to your notation, sequencer or DAW software instructions for specific directions on MIDI recording.

- ❖ Note that MIDI does not pass an audio signal and only transmit control information. Therefore you require a suitable software program to take advantage of this device's comprehensive capabilities.

To Uninstall the USM-422 – Microsoft Windows Vista™

1. Leave your **USM-422** device connected to your computer
2. Go to **Start > Control Panel > Device Manager**

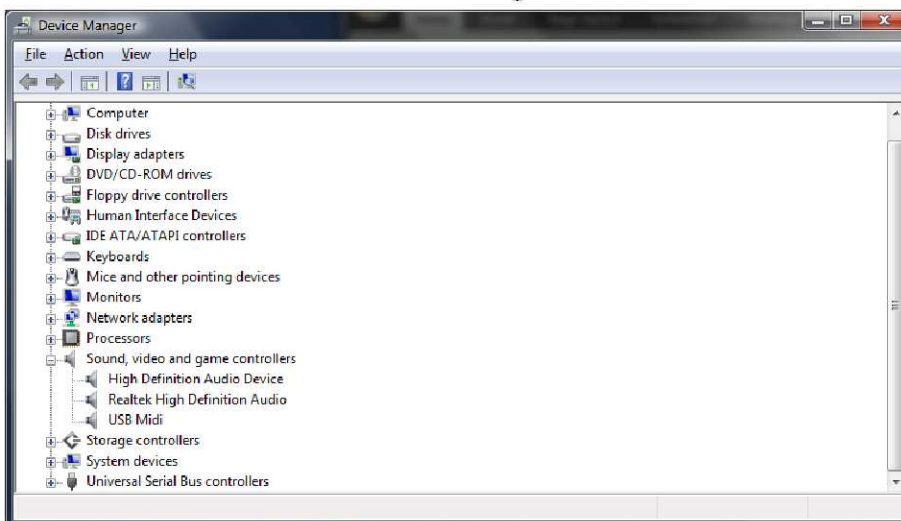

3. Click on “+” sign for **Sound, video and game controllers** to expand folder
4. Right click “**USB Midi**”



5. Click “**OK**”
6. You have now successfully uninstalled the device and you may disconnect it from your computer